

EFURCB Series

Project		
Туре	Date	
Address		
Company		



• Compatible with any home automation system:

CLUTRON




Control (4

- Any on/off switch
- 0 to 100% Dimming capabilities
- Programmable Sequential Timer (Optional)



FEATURES

The Universal Relay Control Box facilitates the management of multiple heaters by establishing diverse heat zones within a designated area through the use of 0-10V solid state relays, offering the user the option to incorporate dimming capbilities to the heaters.

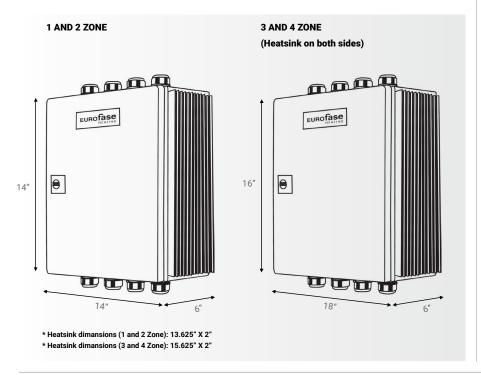

SPECIFICATIONS

EFURCB
Light Grey
208V, 240V, 277V, 480V
50A
200A
0V-10V DC
Surface mount
14"
16"
12"
14"
6"
NEMA 4
3 year
Canada

SPECIFICATION GUIDE

DESCRIPTION	CODE	VOLTAGE	CODE	ZONES	CODE
Universal relay Control Box	EFURCB	120V-240V	24	1 ZONE	M1
		240V-480V	48	2 ZONE	M2
				3 ZONE	M3
				4 ZONE	M4

ORDERING GUIDE EXAMPLE:
Universal relay Control Box + 277V +2 Zone= EFURCB + 48 + M2 =
FFURCB48M2

ORDERING GUIDE EXAMPLE: Universal relay Control Box + 208V + 4 Zone = EFURCB24M4

· For custom manufacturing contact sales