

EFCB Series



- Compatible with any home automation system:

LUTRON

CRESTRON

Control4

- Any on/off switch
- Programmable Sequential Timer (Optional)



INDOOR / OUTDOOR RATED




Intertek


FEATURES

The Contactor panel is suitable for all Eurofase Heaters and can be matched with either a Eurofase single paddle on/off switch or a Eurofase duplex stacked switch. It allows seamless integration of other 120V controls, including timers, thermostats or smart switches.

1 AND 2 ZONE

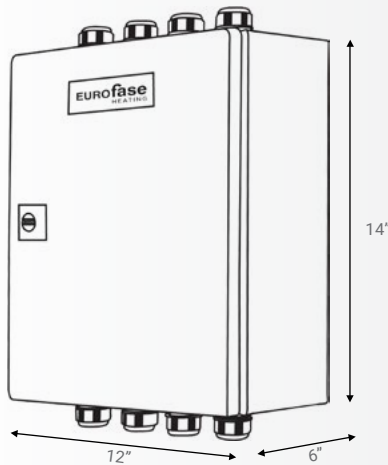

3 AND 4 ZONE

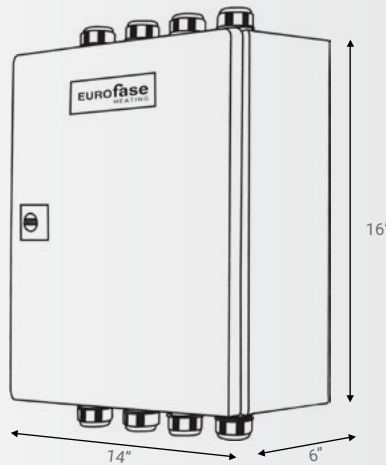

SPECIFICATIONS

SERIES	EFCB
COLOR	Light Grey
INPUT VOLTAGE	208V, 240V, 277V, 480V
ZONE CAPACITY	40A
MAX. AMPERAGE	160A
CONTROL VOLTAGE	120V
MOUNTING TYPE	Surface Mount
HEIGHT (1 and 2 Zone)	14"
HEIGHT (3 and 4 Zone)	16"
LENGTH (1 and 2 Zone)	12"
LENGTH (3 and 4 Zone)	14"
WIDTH	6"
ENCLOSURE RATING	NEMA 4
WARRANTY	3 years
COUNTRY OF ORIGIN	Canada

SPECIFICATION GUIDE

DESCRIPTION	CODE	VOLTAGE	CODE	ZONES	CODE
Contactor Box	EFCB	120V-240V	24	1 ZONE	M1
			48	2 ZONE	M2
		240V-480V		3 ZONE	M3
				4 ZONE	M4

ORDERING GUIDE EXAMPLE:

Contactor Box + 277V + 2 Zone = EFCB + 48 + M2 = EFCB48M2

ORDERING GUIDE EXAMPLE:

Contactor Box + 208V + 4 Zone = EFCB+24+M4 = EFCB24M4

- For custom manufacturing contact sales